

feel the light with us



LIGHTBOOK RETAIL PRIVATE LIMITED

Economy Series

Company PROFILE

LIGHTBOOK RETAIL PRIVATE LIMITED was Founded india, 2014 with the idea of continuous innovation in professional lighting product design & supply as a international Brand company located in Mumbai, India. LIGHTBOOK RETAIL PRIVATE LIMITED provides, Office lighting, Industrial & Outdoor segment.

LIGHTBOOK RETAIL PRIVATE LIMITED focus on Product designing to create Aesthetic and manufacturing LED downlights, all downlights strictly meet the safety and electrical safety requirement of lighting, as our goal is to make home a better and safer place. Our quality policy prove our commitment to the society and enviroment.

LIGHTBOOK RETAIL PRIVATE LIMITED aiming at "Becoming an outstanding innovative lighting company", With good requtation, we put customers on the first place, and is dedicated to bring customers good experience by delivering good customer service, innovative product and ensure quality stability.



BIS APPROVED

Corporate Culture

MISSION

Manufacturing and producing unique high-tech energy efficient and environmentally friendly lighting systems by “light =life” philosophy oriented work team creating functional adaptable and efficient lighting projects by using these unique lighting system and becoming a global brand working for enlightening the world with “FEEL THE LIGHT” principle.


VISION

Be a lighting leader by over specializing in designing and manufacturing LED solution for all segments.

QUALITY POLICY

Create a work module and a system in which all processes are defined constantly revised in parallel with the efficiency increase measured developed and provided with harmony with the other processes.

Provide accredited formative controllable Transparent “Quality Management” system of ours ISO 9001 by the certification put into force by the institution with an international accreditation. Provide all finished product in “LIGHTBOOK RETAIL PRIVATE LIMITED” trademark to be manufactured according to the international standards and norms covering them in accordance with the market of target, provide the product to be complaint with current laws and instructions of their country of production enacted of the standard product guarantee and similar subjects perform scientific and inspiring-innovative work about the efficiency, development and satisfaction. And to be the implementer of the current quality system to be developed and updated in the future this created corporate culture.



About us



**We are
lightbook Retail**



facebook



instagram




twitter

CORPORATE OFFICE

Lightbook Retail Private Limited
Unit No 205, 2nd Floor,
Asher 16, Belleza Building,
Road no-16 Z, Wagle Estate,
Thane (W) - 400604
Mob : 9004069004/9820149056
info@lightbookinternational.com

FACTORY

Lightbook Retail Private Limited
Servey No 243 B & 295, Plot No 10,
J C Industrial Estate, Nama Shivaasthu Udyog Nagar,
Village Kolgaon, Palghar (East) - 401404
Mob : 9004069004/9820149056
pravink@lightbookinternational.com
ashwin@lightbookinternational.com



lightbook
RETAIL PRIVATE LIMITED

Hospitality

Portfolio



Table of Content

LED SPOT LIGHT SERIES	01
DEEP MOVABLE SERIES	09
APOLLO SERIES	13
DARK LIGHT SERIES	17
LINEAR SPOT SERIES	23
ANTI-GLARE SERIES	27
RIMLESS SERIES	27
SMD DOWNLIGHT SERIES	33
SURFACE COB SERIES	41
SURFACE SMD SERIES	45
CEILING PANEL LED	49
LED PROFILES	53
RF REMOTE	58
LED STRIP LIGHT	59
LED DRIVERS	60

lightbook
RETAIL PRIVATE LIMITED



LED SPOT LIGHT SERIES





ALICE

Heat Sink made up of Aluminium CNC.

Front housing made up of aluminium die-casting.

Powder coated with Black-Grafite Grey and White tones. Shade can be customized

Recess mount COB Spot light. Available in various beam angles

CONTROL TYPE :



LED SPOT LIGHT SERIES



ALICE 5W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 40mm Dia.
- Height - 58mm
- Cutout - 35mm
- Beam Angle - 15/24/38/45
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

5W



ALICE 8W-12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 60mm Dia.
- Height - 88mm
- Cutout - 52mm
- Beam Angle - 15/24/38/45
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



08-12W




ALLORA



Heat Sink made up of Aluminium Die-Cast. Front housing made up of Aluminium Die-casting. Powder coated with Black-Grafite Grey and White tones. Shade can be customized
Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :



LED SPOT LIGHT SERIES

ALLORA 5W-9W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 70mm Dia.
- Height - 65mm
- Cutout - 60mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



5W-9W

ALLORA 10W-15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 85mm Dia.
- Height - 75mm
- Cutout - 75mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



10-15W

LED SPOT LIGHT SERIES

ALLORA 18W-20W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 95mm Dia.
- Height - 100mm
- Cutout - 86mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



18W-20W

ALLORA 24W-30W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 115mm Dia.
- Height - 105mm
- Cutout - 105mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



24-30W



TURO

Heat Sink made up of Aluminium Die cast.
Front housing made up of aluminium die-casting.
Powder coated with Black-Grafite Grey and White tones. Shade can be customized
Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :



LED SPOT LIGHT SERIES

TURO 5W-9W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die. cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 80mm Dia.
- Height - 54mm
- Cutout - 68mm
- Beam Angle - 36/45
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



5W-9W

TURO 10W-15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die. cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 108mm Dia.
- Height - 70mm
- Cutout - 95mm
- Beam Angle - 36/45
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



10-15W


lightbook
RETAIL PRIVATE LIMITED

VICTORIA

VICTORIA



DEEP MOVABLE SERIES





VICTORIA

Heat Sink made up of Aluminium DIE-Cast.
Front housing made up of Aluminium Die-casting.
Powder coated with Black-Grafite Grey and White tones. Shade can be customized
Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :



DEEP MOVABLE SERIES

VICTORIA MOVABLE 5W-9W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 78mm Dia.
- Height - 65mm
- Cutout - 72mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



5W-9W

VICTORIA MOVABLE 10W-15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 88mm Dia.
- Height - 75mm
- Cutout - 80mm
- Beam Angle - 38 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



10-15W

DEEP MOVABLE SERIES



VICTORIA MOVABLE 18W-20W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 100mm Dia.
- Height - 97mm
- Cutout - 94mm
- Beam Angle - 38 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black

18W-20W



VICTORIA MOVABLE 24W-30W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 120mm Dia.
- Height - 101mm
- Cutout - 113mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black

24W-30W

lightbook

RETAIL PRIVATE LIMITED

A FRIEND
IS ONE THAT
KNOWS YOU
AS YOU ARE
UNDERSTANDS
WHERE YOU HAVE
BEEN
ACCEPTS WHAT YOU
HAVE AND STILL
ALLOWS YOU TO
GROW

APOLLO SERIES



APOLLO



Heat Sink made up of Aluminium Die cast
Front housing made up of aluminium die-casting.
Powder coated with Black-Grafite Grey and White tones.
Shade can be customized.
Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :



LED SPOT LIGHT SERIES

APOLLO FLAT RING 8W-15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 82mm Dia.
- Height - 65mm
- Cutout - 75mm
- Beam Angle - 12/24/36/60 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



FIXED

8W-15W

APOLLO FLAT MOVABLE 8W-15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 85mm Dia.
- Height - 75mm
- Cutout - 75mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



MOVABLE

8W-15W

LED SPOT LIGHT SERIES

APOLLO DEEP RECESS

8W-15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 85mm Dia.
- Height - 90mm
- Cutout - 75mm
- Beam Angle - 12/2436/60 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



FIXED

8W-15W

APOLLO DEEP MOVABLE

8W-15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 92mm Dia.
- Height - 97mm
- Cutout - 85mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black




MOVABLE

8W-15W

lightbook
RETAIL PRIVATE LIMITED

DARK LIGHT SERIES

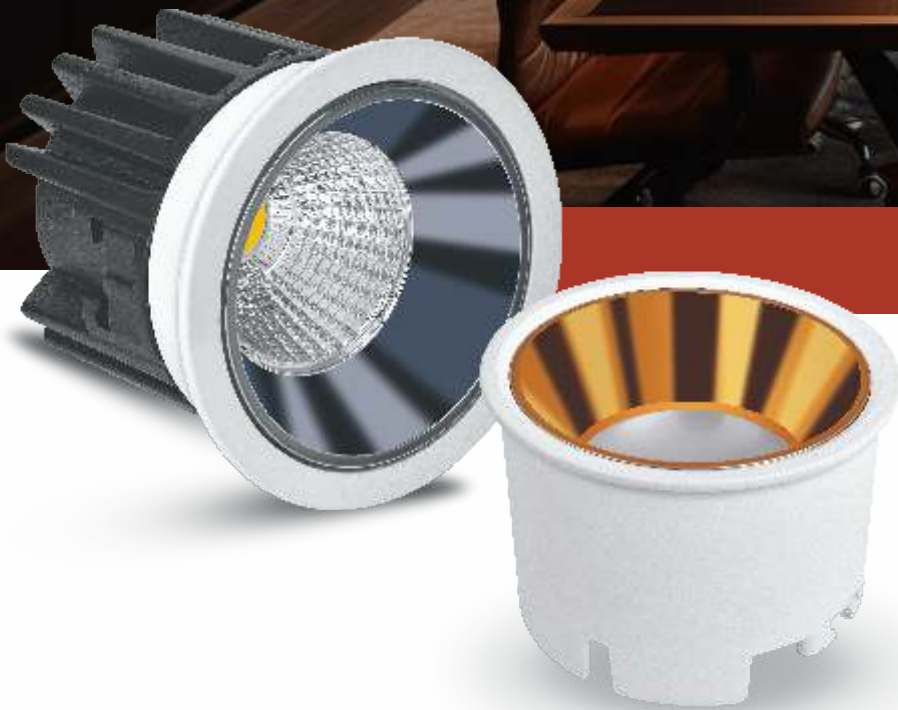



JOIS

JOIS

STROM

JOIS

Heat Sink made up of Aluminium Die cast
 Front Reflector made up of Aluminium with Metallic finish
 Powder coated with Black-Grafite Grey and White tones. Shade can be customized
 Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :



DARK LIGHT SERIES

JOIS 6W-8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die. cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 64mm Dia.
- Height - 59mm
- Cutout - 60mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



6W-8W

JOIS 10W-12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die. cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 81mm Dia.
- Height - 70mm
- Cutout - 76mm
- Beam Angle - 36/45
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black



10W-12W

DARK LIGHT SERIES



JOIS

JOIS 15W-18W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 83mm Dia.
- Height - 98mm
- Cutout - 74mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

15W-18W



STROM

STROM 6W-8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 70mm Dia.
- Height - 55mm
- Cutout - 60mm
- Beam Angle - 45 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black


6W-8W

DARK LIGHT SERIES

STROM 10W-12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 88mm Dia.
- Height - 60mm
- Cutout - 75mm
- Beam Angle - 45 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

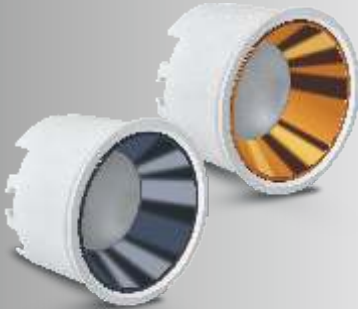

10W-12W


STROM 15W-18W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 98mm Dia.
- Height - 65mm
- Cutout - 88mm
- Beam Angle - 45 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



15W-18W



lightbook
RETAIL PRIVATE LIMITED



BIS APPROVED

LED

CORPORATE
& COMMERCIAL


5000+
PROJECT COMPLETED

lightbook
RETAIL PRIVATE LIMITED



LINEAR SPOT SERIES



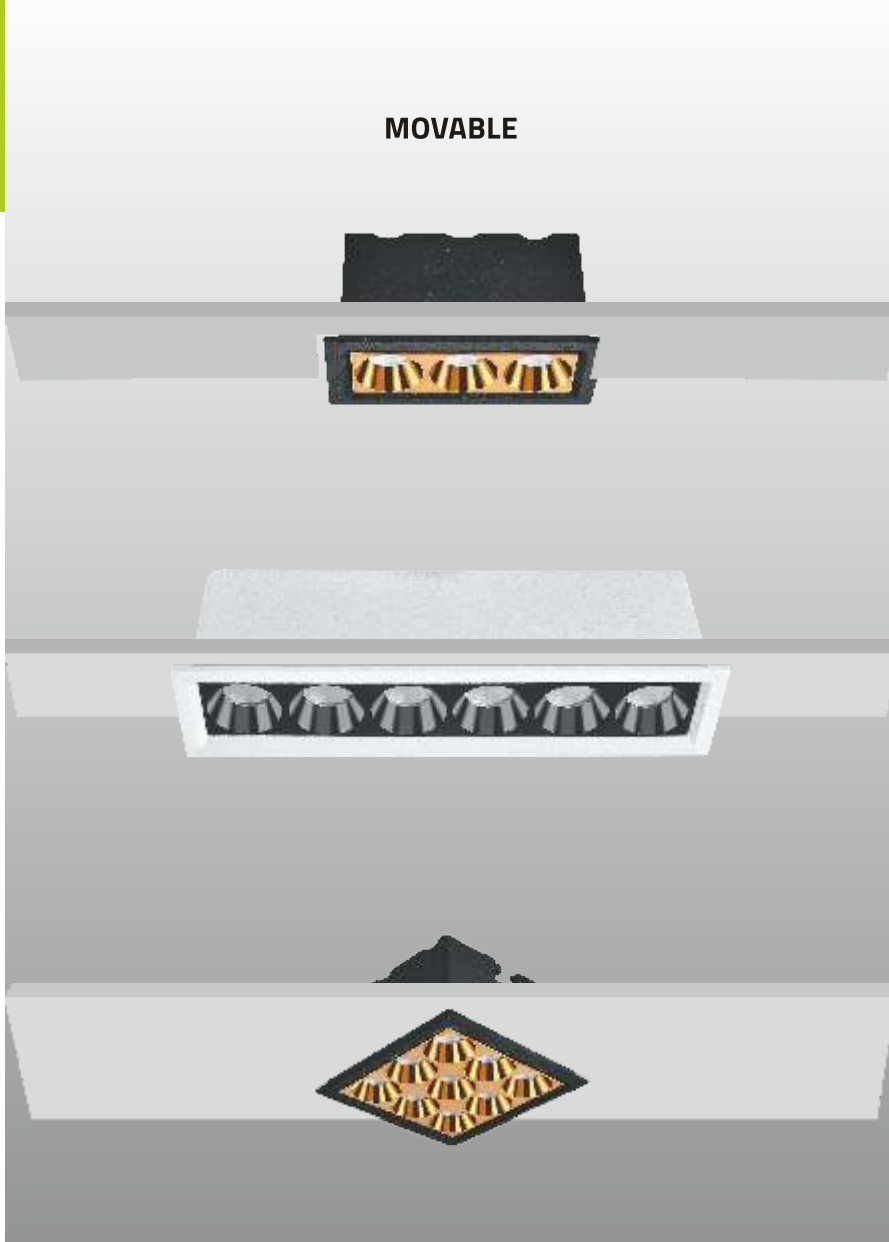

AJITAH

Heat Sink made up of Aluminium DIE-Cast.

Front housing made up of Aluminium Die-casting.

Powder coated with Black-Grafite Grey and White tones. Shade can be customized

Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :




LINEAR SPOT SERIES

AJITAH 6W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 74mm L x 34mm W
- Height - 60mm
- Cutout - 66mm L x 25mm W
- Beam Angle - 40 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

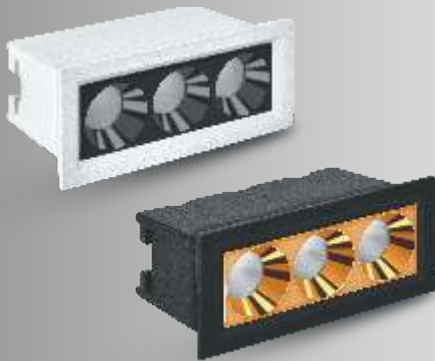

6W

AJITAH 8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 54mm L x 54mm W
- Height - 40mm
- Cutout - 45mm L x 45mm W
- Beam Angle - 40 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



8W

LINEAR SPOT SERIES

AJITAH 12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 134mm L x 34mm W
- Height - 40mm
- Cutout - 125mm L x 26mm W
- Beam Angle - 40 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

12W

AJITAH 18W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 73mm L x 73mm W
- Height - 40mm
- Cutout - 65mm L x 65mm W
- Beam Angle - 40 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

18W



lightbook
RETAIL PRIVATE LIMITED




**ANTI-GLARE SERIES
RIMLESS SERIES**





15W-18W

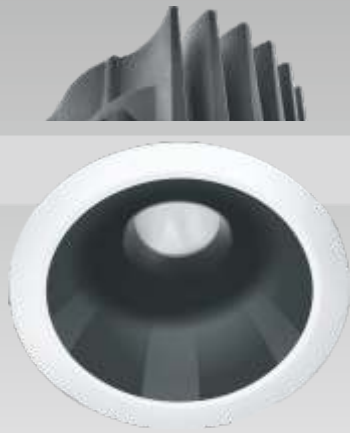

TUX/LUXOR

Heat Sink made up of Aluminium DIE-Cast.

Front housing made up of Aluminium Die-casting.

Powder coated with Black-Grafite Grey and White tones. Shade can be customized

Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :





TUX 8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 57mm dia
- Height - 72mm
- Cutout - 48mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

8W

ANTI GLARE

Heat Sink made up of Aluminium Die cast
 Front housing made up of aluminium die-casting.
 Powder coated with Black-Grafite Grey and White tones.
 Shade can be customized.
 Recess mount COB Spot light. Available in various beam angels

TUX 12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 68mm dia
- Height - 80mm
- Cutout - 58mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

12W



ANTI-GLARE SERIES

LUXOR 10W-12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 70mm Dia.
- Height - 84mm
- Cutout - 62mm
- Beam Angle - 38 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



10W-12W

LUXOR 15W-18W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 85mm Dia.
- Height - 90mm
- Cutout - 76mm
- Beam Angle - 38 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey




15W-18W



8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 70mm Dia.
- Height - 55mm
- Cutout - 60mm
- Beam Angle - 38 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

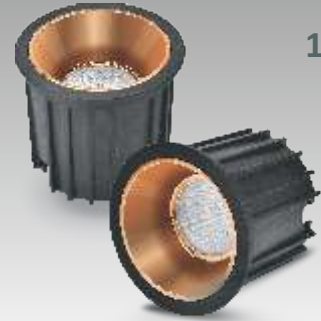

12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 88mm Dia.
- Height - 60mm
- Cutout - 75mm
- Beam Angle - 38 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey


KOPAL



18W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 98mm Dia.
- Height - 65mm
- Cutout - 88mm
- Beam Angle - 38 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



10W-12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 70mm Dia.
- Height - 65mm
- Cutout - 40mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



10W/12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 70mm Dia.
- Height - 65mm
- Cutout - 40mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 70mm Dia.
- Height - 65mm
- Cutout - 40mm
- Beam Angle - 36 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



10W/12W

lightbook
RETAIL PRIVATE LIMITED



SMD DOWNLIGHT SERIES





DAWN 24W



AVYUKT

Heat Sink made up of Aluminium DIE-Cast.

Front housing made up of Aluminium Die-casting.

Powder coated with Black-Grafite Grey and White tones. Shade can be customized

Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :





8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 90mm Dia.
- Height - 56mm
- Cutout - 85mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



12W/15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 100mm Dia.
- Height - 56mm
- Cutout - 90mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



AVYUKT



18W/22W


TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 125mm Dia.
- Height - 56mm
- Cutout - 105mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

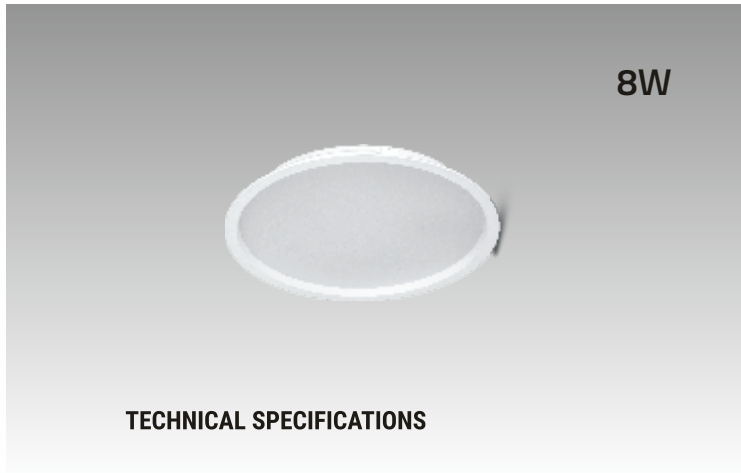

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 84mm Dia.
- Height - 30mm
- Cutout - 74mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

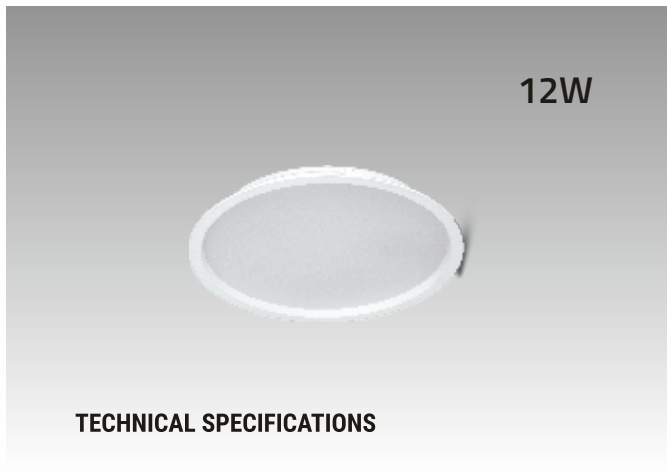

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 110mm Dia.
- Height - 30mm
- Cutout - 100mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 155mm Dia.
- Height - 30mm
- Cutout - 145mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey





12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 120mm Dia.
- Height - 50mm
- Cutout - 110mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



18W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 155mm Dia.
- Height - 55mm
- Cutout - 145mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey


DAWN



24W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 175mm Dia.
- Height - 55mm
- Cutout - 165mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 108mm Dia.
- Height - 24mm
- Cutout - 100mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 133mm Dia.
- Height - 24mm
- Cutout - 125mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 158mm Dia.
- Height - 24mm
- Cutout - 150mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey





8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 120mm Dia.
- Height - 50mm
- Cutout - 110mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 155mm Dia.
- Height - 55mm
- Cutout - 145mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

ROYAL



22W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Phillips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 175mm Dia.
- Height - 55mm
- Cutout - 165mm
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



BIS APPROVED

LED CORPORATE
& COMMERCIAL

5000+
PROJECT COMPLETED

lightbook
RETAIL PRIVATE LIMITED



SURFACE COB SERIES





ROYAL

Heat Sink made up of Aluminium DIE-Cast.
Front housing made up of Aluminium Die-casting.
Powder coated with Black-Grafite Grey and White tones. Shade can be customized
Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :




COB SURFACE SERIES

20W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 94mm dia
- Height - 125mm
- Cutout - NA
- Beam Angle - 40 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

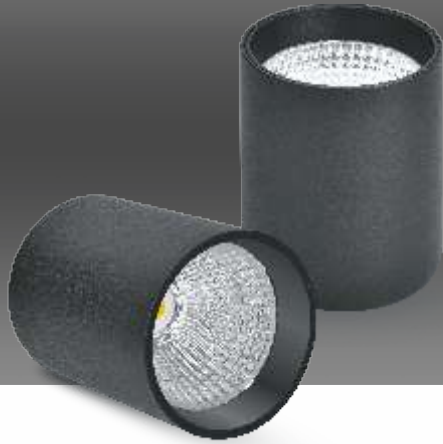

ROYAL

30W

TECHNICAL SPECIFICATIONS

- Material - Aluminum CNC
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 94mm dia
- Height - 150mm
- Cutout - NA
- Beam Angle - 40 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey




GLAMIS



8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 55mm Dia.
- Height - 70mm
- Cutout - NA
- Beam Angle - 40deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

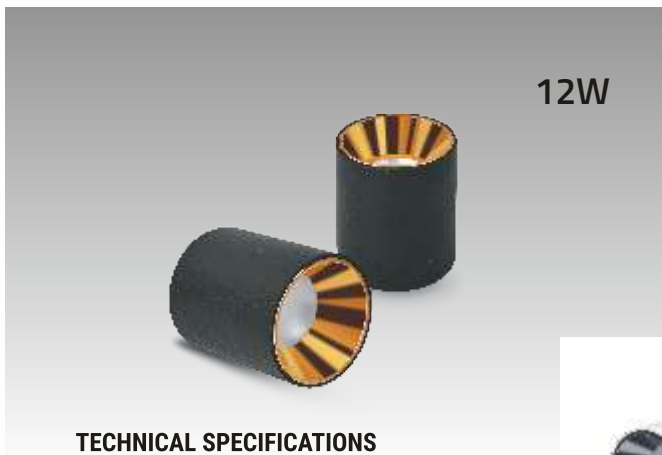


12W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 88mm Dia.
- Height - 60mm
- Cutout - NA
- Beam Angle - 40 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 98mm Dia.
- Height - 65mm
- Cutout - NA
- Beam Angle - 40 deg.
- LED - COB (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey

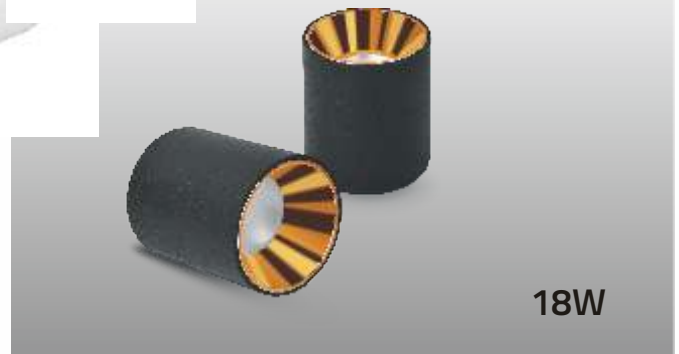

18W



lightbook
RETAIL PRIVATE LIMITED



SURFACE SMD SERIES



LOWWA

Heat Sink made up of Aluminium DIE-Cast.

Front housing made up of Aluminium Die-casting.

Powder coated with Black-Grafite Grey and White tones. Shade can be customized

Recess mount COB Spot light. Available in various beam angels

CONTROL TYPE :





8W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 90mm Dia.
- Height - 75mm
- Cutout - NA
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



15W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 110mm Dia.
- Height - 75mm
- Cutout - NA
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey


LOWA



22W

TECHNICAL SPECIFICATIONS

- Material - Aluminum Die Cast
- Reflector - Anodized Aluminium
- Driver - Philips / Fulham / lightbook
- CCT - 3000k/4000k/5000k/6000k
- Outer - 125mm Dia.
- Height - 75mm
- Cutout - NA
- Beam Angle - 120 deg.
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80/90
- IP - IP 20
- Finish - White / Black / Grafite Grey



lightbook

RETAIL PRIVATE LIMITED

5000+

PROJECT COMPLETED

LED CORPORATE
& COMMERCIAL




BIS APPROVED

lightbook
RETAIL PRIVATE LIMITED



CEILING PANEL LED



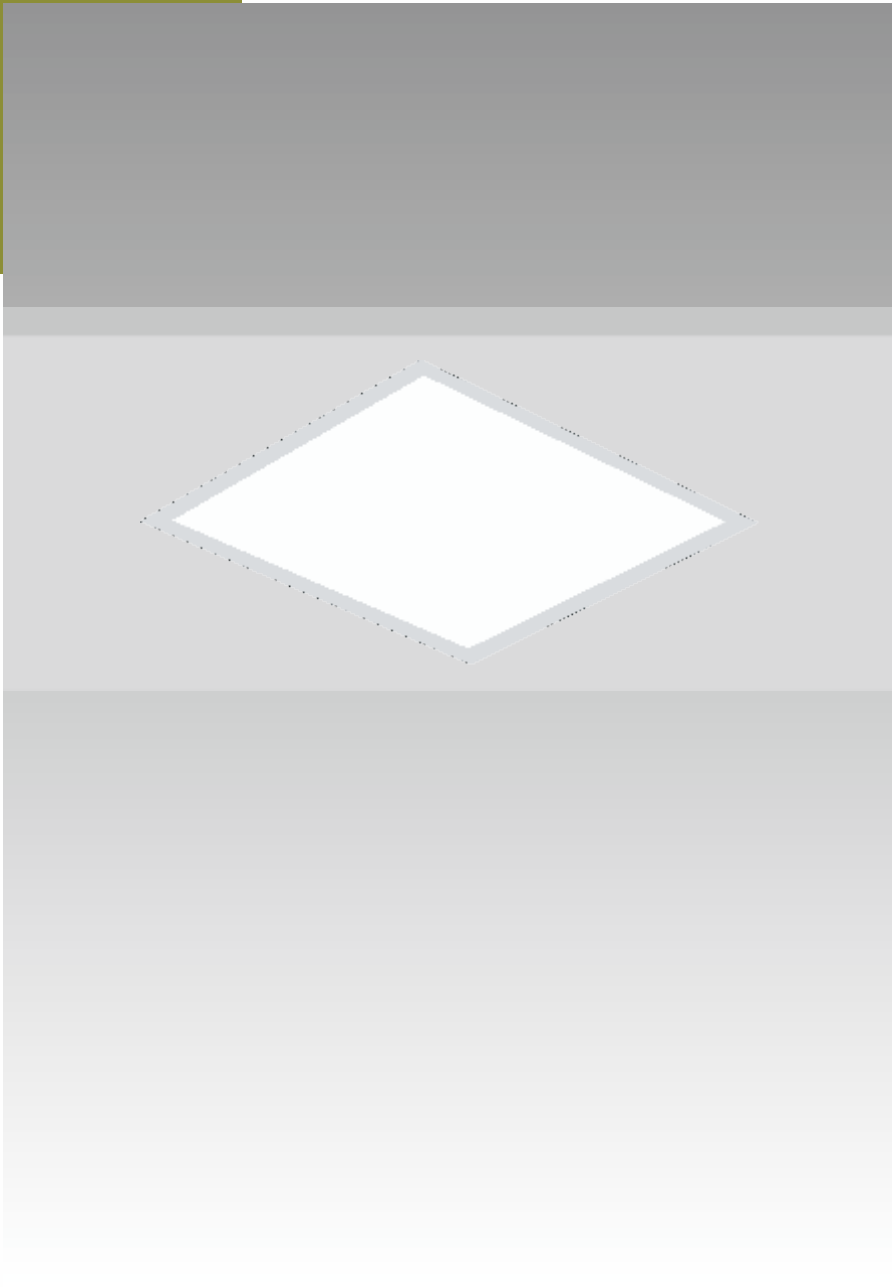

HARMONY



Housing made up of MS CRCA / Deep Drawn.. High efficacy with Various color temperature Recess mount Luminaire. This LED Luminaire provides with a comfort illumination frosted diffuser, direct - indirect symmetrical distribution effectively.


Powder coated with Black and White tones. Shade can be customized, available in various design customization

CONTROL TYPE :



HARMONY-R

30W / 40W

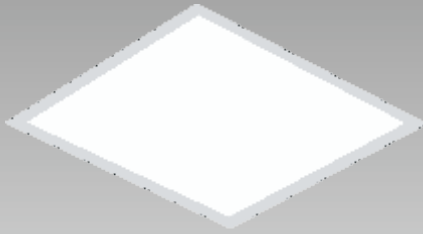


TECHNICAL SPECIFICATIONS

- Material - MS CRCA
- Optics - High Transparency Diffusor
- Driver - BAG / Tridonic / Fulham / Lightbook
- CCT - 3,000K / 4,000K / 5,000K / 6,500K
- Outer - 595 x 595mm
- Height - 75mm
- Cutout - 575 x 575mm
- Beam Angle - 98°
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - Ra ≥ 80
- IP - IP 20
- Finish - Powder Coated White / Black

HARMONY-S

30W / 40W

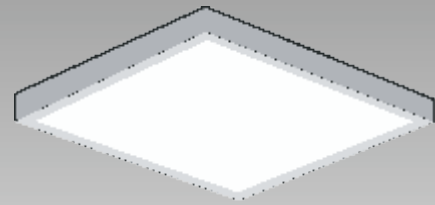

TECHNICAL SPECIFICATIONS

- Material - MS CRCA / Aluminum Die Cast
- Optics - High Transparency Diffusor
- Driver - BAG / Tridonic / Fulham / Lightbook
- CCT - 3,000K / 4,000K / 5,000K / 6,500K
- Outer - 595 x 595mm
- Height - 75mm
- Cutout - NA
- Beam Angle - 98°
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - Ra ≥ 80
- IP - IP 20
- Finish - Powder Coated White / Black

HARMONY ■ CEILINGO

CEILINGO

30W / 40W



TECHNICAL SPECIFICATIONS

- Material - MS CRCA
- Optics - High Transparency Diffusor
- Driver - BAG / Tridonic / Fulham / Lightbook
- CCT - 3,000K / 4,000K / 5,000K / 6,500K
- Outer - 1200L x 82W x 78H
- Height - 78mm
- Cutout - 1158L x 62W
- Beam Angle - 98°
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - Ra ≥ 80
- IP - IP 20
- Finish - Powder Coated White / Black

SURFINGO


30W / 40W



TECHNICAL SPECIFICATIONS

- Material - Aluminum Extrusion
- Optics - High Transparency Diffusor
- Driver - BAG / Tridonic / Fulham / Lightbook
- CCT - 3,000K / 4,000K / 5,000K / 6,500K
- Outer - 595 x 595mm
- Height - 75mm
- Cutout - 1200mm X 62mm X 75 mm
- Beam Angle - 120°
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - Ra ≥ 80
- IP - IP 20
- Finish - Powder Coated White / Black

RADIUS-R 30W / 40W / 60W / 70W

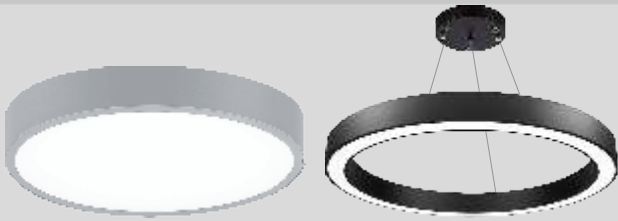

TECHNICAL SPECIFICATIONS

- Material - MS / Aluminium
- Optics - High Transparency Diffusor
- Driver - BAG / Tridonic / Fulham / Lightbook
- CCT - 3,000K / 4,000K / 5,700K
- Outer - 320mm / 480mm / 600mm / 750mm
- Height - 75mm
- Cutout - Watt - 30W / 40W / 60W / 70W
- Beam Angle - 98° / 120°
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - Ra ≥ 80 Ra ≥ 90
- IP - IP 20
- Finish - Powder Coated White / Black

STENCIL 30W / 40W



TECHNICAL SPECIFICATIONS

- Material - Aluminum Extrusion
- Optics - High Transparency Diffusor
- Driver - BAG / Tridonic / Fulham / Lightbook
- CCT - 3,000K / 4,000K / 5,000K / 6,500K
- Outer - 1200 mm x 50mm
- Height - 75mm
- Cutout - NA
- Beam Angle - 98°
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - Ra ≥ 80
- IP - IP 20
- Finish - Powder Coated White / Black

RADIUS · STENCIL · EXILE · LINE XS



LINE XS 30W / 40W

TECHNICAL SPECIFICATIONS

- Material - Poly Carbonate / Aluminum Extrusion
- Optics - High Transparency Diffusor
- Driver - Inbuilt
- CCT - 4,000K / 5,000K / 6,500K
- Outer - 600 mm / 900mm / 1200mm - Length
- Height - 30mm
- Cutout - Watt - 9W / 14W / 20W
- Beam Angle - 120°
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80
- IP - IP 20
- Finish - White / Black



EXILE 5235 / 6535 30W / 40W


TECHNICAL SPECIFICATIONS

- Material - Aluminum Extrusion
- Optics - High Transparency Diffusor
- Driver - BAG / Tridonic / Fulham / Lightbook
- CCT - 3,000K / 4,000K / 5,000K / 6,500K
- Outer - 1 ft. to 12 ft.
- Height - 75mm
- Cutout - As per site customization
- Beam Angle - 120°
- LED - SMD (Cree/Bridglux/Citizen/Evercore)
- CRI - 80
- IP - IP 20
- Finish - Powder Coated White / Black



LED PROFILES


LED ALUMINIUM PROFILE

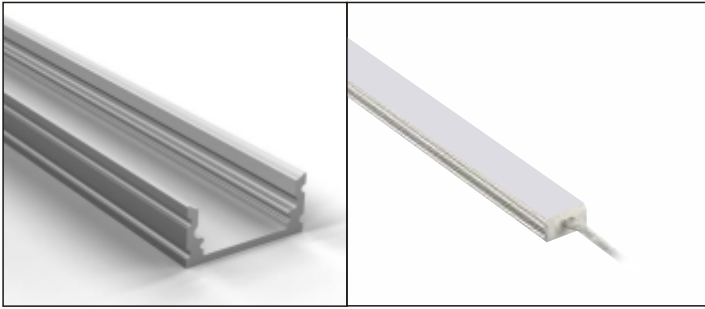

LBRL-1011-S

TECHNICAL SPECIFICATIONS



- ALUMINIUM PROFILE
- SURFACE MOUNTING
- SIZE : 6.85 X 17.3 (MM)
- STANDARD LENGTH : 2/3 MTR



LBRL-1011-R

TECHNICAL SPECIFICATIONS



- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 6.85 X 24.5 (MM)
- STANDARD LENGTH : 2/3 MTR

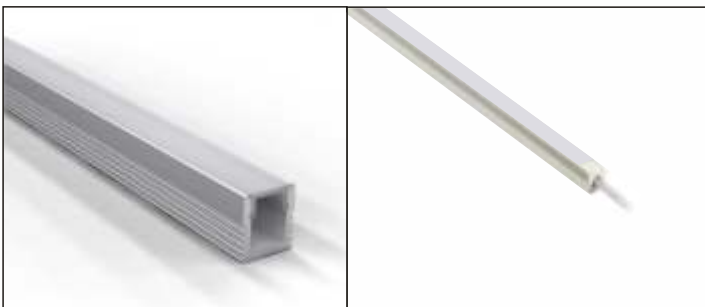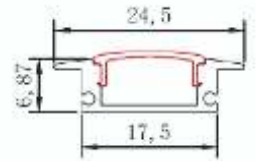

LBRL-1012-S

TECHNICAL SPECIFICATIONS



- ALUMINIUM PROFILE
- SURFACE MOUNTING
- SIZE : 9 X 7.5 (MM)
- STANDARD LENGTH : 2/3 MTR

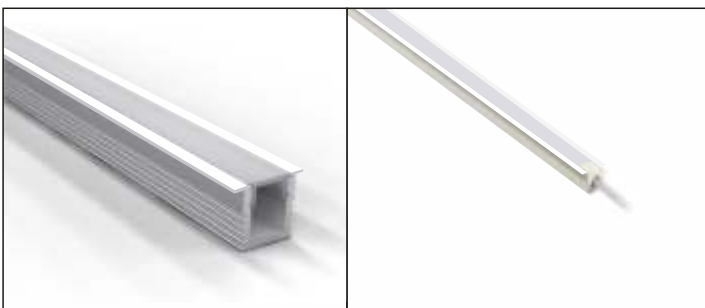

LBRL-1012-R

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 9 X 7.5 (MM)
- STANDARD LENGTH : 2/3 MTR

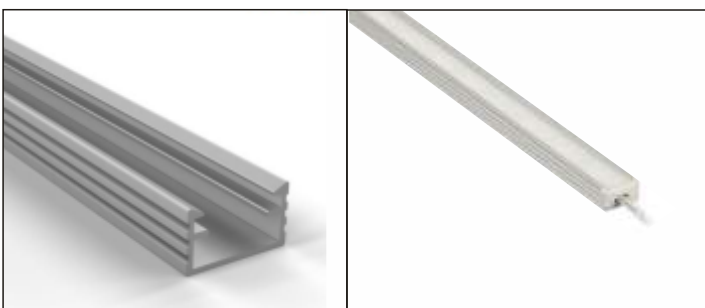


LBRL-1013-S

TECHNICAL SPECIFICATIONS

- ALUMINIUM PROFILE
- SURFACE MOUNTING
- SIZE : 9.7 X 23.3 (MM)
- STANDARD LENGTH : 2/3 MTR

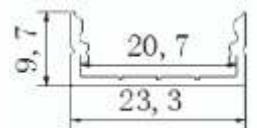


LED ALUMINIUM PROFILE

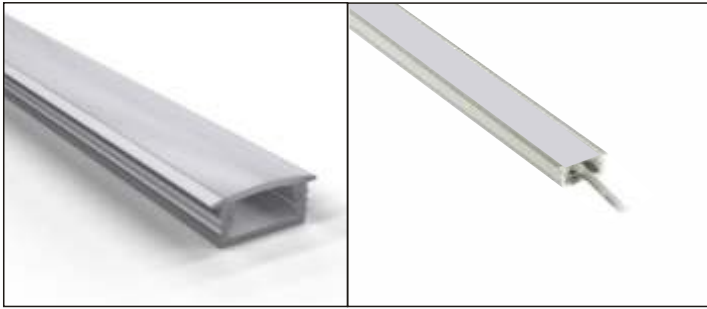

LBRL-1013-R

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 9.7X 25 (MM)
- STANDARD LENGTH : 2/3 MTR

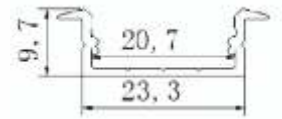

LBRL-1014-S

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- SURFACE MOUNTING
- SIZE : 12.9 X10 (MM)
- STANDARD LENGTH : 2/3 MTR



LBRL-1014-R

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 12.9X 14 (MM)
- STANDARD LENGTH : 2/3 MTR



LBRL-1015-S

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- SURFACE MOUNTING
- SIZE : 6.45 X11 (MM)
- STANDARD LENGTH : 2/3 MTR

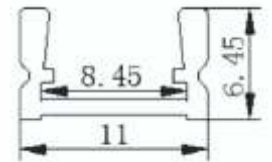

LBRL-1015-R

TECHNICAL SPECIFICATIONS

- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 6.45X 14 (MM)
- STANDARD LENGTH : 2/3 MTR

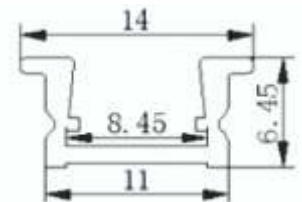


LED ALUMINIUM PROFILE



LBRL-1016-S

TECHNICAL SPECIFICATIONS



- ALUMINIUM PROFILE
- SURFACE MOUNTING
- SIZE : 14.5 X 17.4 (MM)
- STANDARD LENGTH : 2/3 MTR



LBRL-1016-R

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 17X 25 (MM)
- STANDARD LENGTH : 2/3 MTR

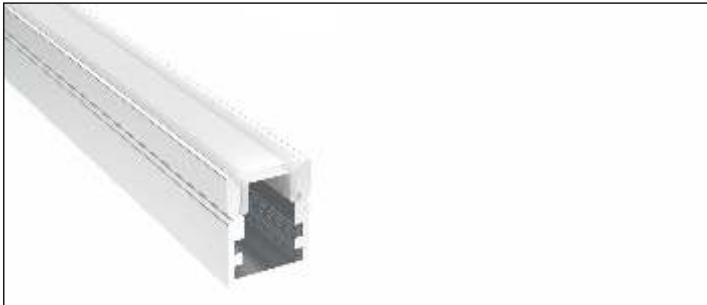

LBRL-1017-S

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- SURFACE MOUNTING
- SIZE : 13 X 13 (MM)
- STANDARD LENGTH : 2/3 MTR



LBRL-1018-R

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 19.7X 23.8 (MM)
- STANDARD LENGTH : 2/3 MTR



LBRL-1019-C

TECHNICAL SPECIFICATIONS

- ALUMINIUM PROFILE
- CORNOR SURFACE MOUNTING
- SIZE : 15.8X 15.8 (MM)
- STANDARD LENGTH : 2/3 MTR




LED ALUMINIUM PROFILE



LBRL-1020-R

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 35X 45 (MM)
- STANDARD LENGTH : 2/3 MTR



LBRL-1021-S/H

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 52X 35(MM)
- STANDARD LENGTH : 2/3 MTR

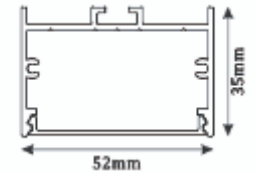

LBRL-1021-R

TECHNICAL SPECIFICATIONS



- ALUMINIUM PROFILE
- RECESSED MOUNTING
- SIZE : 65X 35(MM)
- STANDARD LENGTH : 2/3 MTR

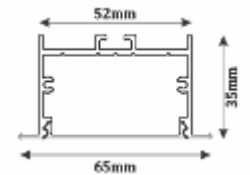

LBRL-1022-S

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- SURFACE MOUNTING
- SIZE : 35 X 35 (MM)
- STANDARD LENGTH : 2/3 MTR

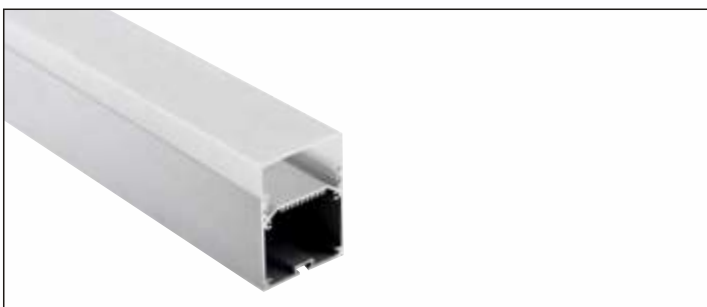

LBRL-1023-H

TECHNICAL SPECIFICATIONS

- ALUMINIUM PROFILE
- HANGING / SURFACE MOUNTING
- SIZE : 52 X 75 (MM)
- STANDARD LENGTH : 2/3 MTR




LED ALUMINUM PROFILE



LBRL-1024-H

TECHNICAL SPECIFICATIONS


- ALUMINIUM PROFILE
- HANGING / SURFACE MOUNTING
- SIZE : 35 X 70 (MM)
- STANDARD LENGTH : 2/3 MTR



LBRL-1025-H

TECHNICAL SPECIFICATIONS

- ALUMINIUM PROFILE
- HANGING / SURFACE MOUNTING
- SIZE : 75 X 75 (MM)
- STANDARD LENGTH : 2/3 MTR



RF REMOTE FOR TUNABLE AND DIMMABLE

MODEL	RF REMOTE
INPUT VOLTAGE	DC3V (SIZE AAA)
CONTROL RANGE	≥15-30m
PROTOCOL	2.4G/mesh /Zigbee



LED STRIP LIGHT

Sr. No.	Type	Width in mm	No. of LED	Voltage	Packing/ Roll
1	2835	5	120	24V	5 MTR
2	2835	5	168	24V	5 MTR
3	2835	8	120	24V	10 MTR
4	2835	10	180	12V	5 MTR
5	2835	10	180	24V	5 MTR
6	2835	10	240	12V	5 MTR
7	2835	10	240	24V	5 MTR
8	2835	15	240x2	24V	5 MTR
9	2835	30	120x3	12V	25 MTR
10	DROPLESS-2835 MOS	10	120	24V	20 MTR
11	2835-CCT	10	180	12V	5 MTR
12	2835-CCT	10	192	24V	5 MTR
13	3535 RGB	8	120	12V	5 MTR
14	3535 RGB	8	120	24V	5 MTR
15	DOTLESS	5	400	24V	5 MTR
16	DOTLESS	8	512	24V	5 MTR
17	DOTLESS CCT	10	544	24V	5 MTR
18	DOTLESS RGB	10	744	24V	5 MTR
19	5050 RGBWH	12	60	24V	5 MTR
20	5050 RGBWW	12	60	24V	5 MTR
21	5050 RGBWHWW	12	72	24V	5 MTR
22	5050 RGB IC WS2811	10	60	24V	5 MTR
23	5050 RGB IC WS16703	10	60	24V	10 MTR
24	2835 IC WS2811	10	120	24V	10 MTR
25	2835 CCT IC WS2811	10	120	24V	10 MTR
26	2835 IP65	5	168	24V	5 MTR
27	2835 IP67	5	120	24V	5 MTR
28	IP65 WALL GLAZER	20	60	24V	5 MTR



DIMMABLE DRIVER



CURRENT	VOLTAGE	DIMMING TYPE	CURRENT	VOLTAGE	DIMMING TYPE
150 Ma	8-43 V	TRIAC	300 Ma	30-60 V	0-10V
200 Ma	8-43 V	TRIAC	500 Ma	12-24 V	0-10V
250 Ma	8-43 V	TRIAC	700 Ma	18-36 V	0-10V
300 Ma	8-40 V	TRIAC	300 Ma	2-42 V	DALI
300 Ma	40-65 V	TRIAC	200/250 300/350 Ma	9-42 V	DALI
350 Ma	8-40 V	TRIAC	350/400 450/500 Ma	9-42 V	DALI
400 Ma	8-40 V	TRIAC	550/600 650/700 Ma	9-42 V	DALI
500 Ma	8-40 V	TRIAC	200/250 300/350 Ma	9-42 V	3 CCT DALI
700 Ma	8-26 V	TRIAC	350/400 450/500 Ma	9-42 V	3 CCT DALI
700 Ma	26-43 V	TRIAC			

YSO SMPS

WATERPROOF SMPS




VOLTAGE	WATT
12V/24V	30
12V/24V	60
12V/24V	100
12V/24V	150
12V/24V	200
12V/24V	250
12V/24V	300

DIMMABLE SMPS 3 IN 1



VOLTAGE	WATT
12V/24V	60
12V/24V	100
12V/24V	150
12V/24V	200
12V/24V	250
12V/24V	300
12V/24V	350



LIGHTBOOK RETAIL PRIVATE LIMITED

Sales Enquiry

Phone / Mobile

022-49230210 / 9004069004

Email

info@lightbookinternational.com

customercare@lightbookinternational.com

pravink@lightbookinternational.com

ashwin@lightbookinternational.com

After Sales & Service / Escalations

Phone / Mobile

022-49230210 / 8291919204

Email

koushal.jha@lightbookinternational.com

qa@lightbookinternational.com

quality@lightbookinternational.com

CC:

paresh@lightbookinternational.com

finance@lightbookinternational.com

pravink@lightbookinternational.com

feel the light with us

lightbook
RETAIL PRIVATE LIMITED



CORPORATE OFFICE

Lightbook Retail Private Limited
Unit No 205, 2nd Floor,
Asher 16, Belleza Building,
Road no-16 Z, Wagle Estate,
Thane (W) - 400604
Mob : 9004069004/9820149056
info@lightbookinternational.com

FACTORY

Lightbook Retail Private Limited
Servey No 243 B & 295, Plot No 10,
J C Industrial Estate, Nama Shivaasthu Udyog Nagar,
Village Kolgaon, Palghar (East) - 401404
Mob : 9004069004/9820149056
pravink@lightbookinternational.com
ashwin@lightbookinternational.com